

Linus60


The Linus range from IMI Cornelius is the classic unit among our overcounter coolers. A dry cooler in a timeless stainless steel design and fitted with our BT2000 beer tap. With its reliable cooling technology the Linus60 is quickly ready for use without long pre-cooling periods.

- Excellent workmanship for a high quality classic overcounter cooler
- Cost-effective cooling performance
- Instantly ready for use
- Available as a single or double dispense tap version
- High dispensing capacity

Key features

- Classic design, high-quality, modern look in stainless steel design
- Fountain dispensing made easy
- Superior performance
- Ideal for home use too



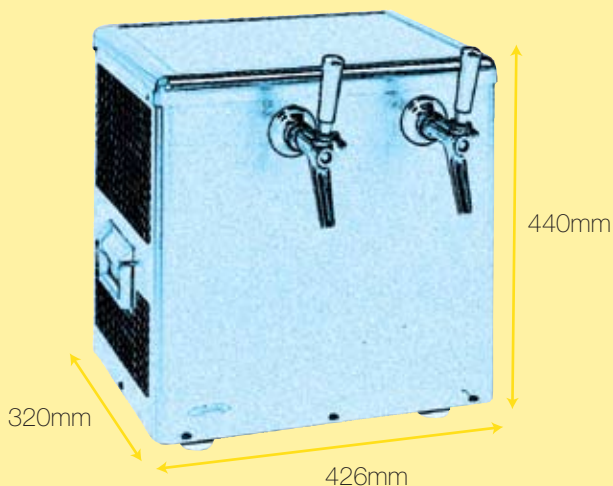

Performance:	
Continuous product cooling per hour with a ΔT of:	
10°C	64 litres
20°C:	32 litres
Maximum ambient temperature:	32°C
Heat emission:	1200 watts
Weight:	
Equipment weight:	38 kg
Packed weight:	40 kg
Electrical:	
Mains supply:	230 v / 50 hz
Power consumption:	450 watts
Supply:	2 m mains cable euro style plug
Refrigeration:	
Compressor:	11 cc / 1/3 hp
Compressor duty at 0°C Evaporation:	628 watts
Cooling performance continuously:	744 watts / 640 kcal

Product coils:	
Material:	Stainless steel
Number of coils:	1 or 2
Length of coils:	8m
Diameter (internal/external):	7/8mm or 10/11mm
Control type:	
	Mechanical thermostat

Compliance To Standards And Legislation
 All coolers comply with Brewers Society Code of Practice for Electrical Safety in Beer Dispense in Licensed Premises. Designed to EN60335 part1 (Safety of Household and Similar Electrical Appliances-General Requirements). Product coils are made from 304 stainless steel. Product complies with the current EMC Directive.

IMI Cornelius reserves the right to modify the details in the publication as products and specifications are updated and improved. All data contained in this literature is correct at time of print. To ensure technical data is accurate please contact IMI Cornelius prior to placing your order.

